


the max.

# /TI 6

Properties and Cleaning of  
MAX High-Pressure Laminates (HPL),  
MAX Compact Laminates (HPL) and  
MAX Melamine-Faced Chipboard.

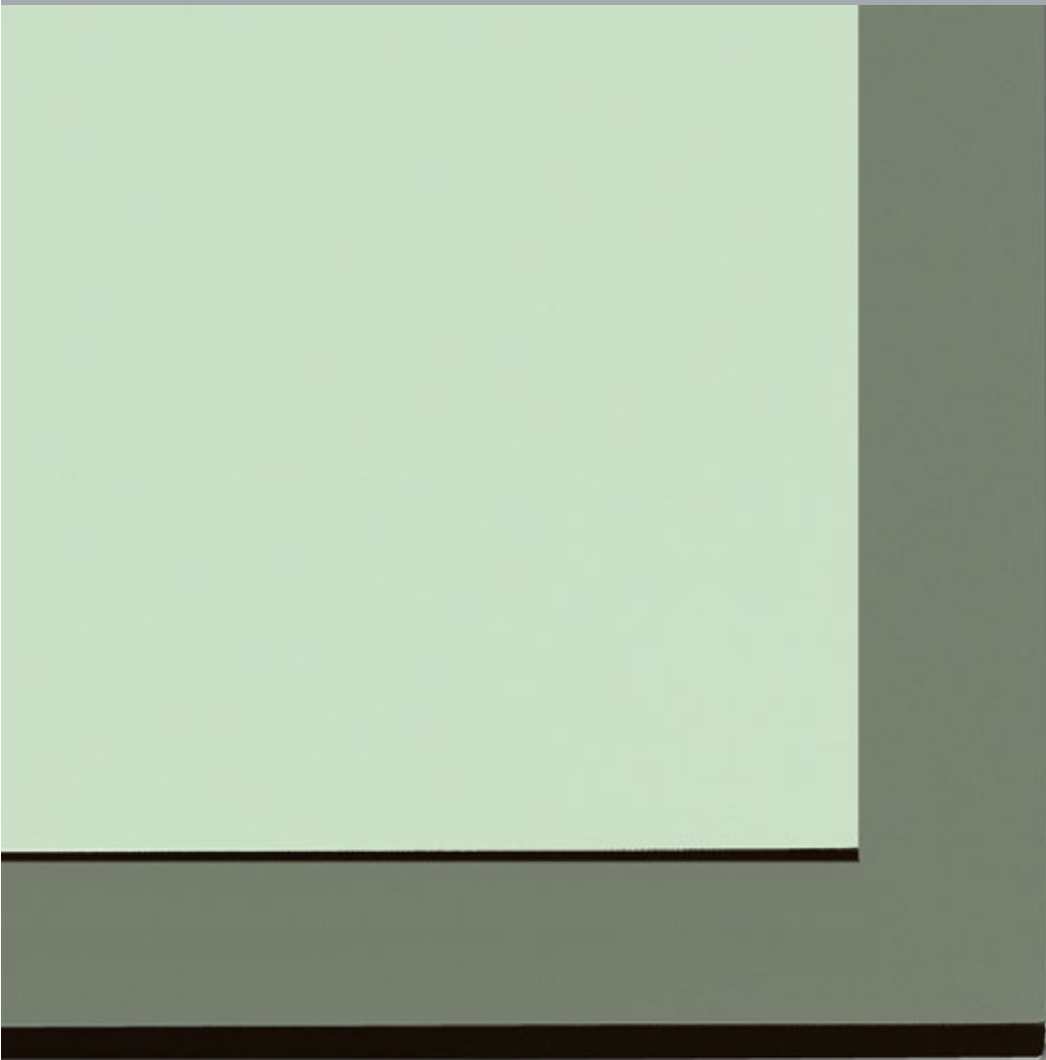

Other publications in our  
Technical Information series:

- TI 1: Tender Recommendations
- TI 2: Working with MAX Postforming Laminates (out of print)
- TI 3: Working with MAX Compact Laminates and  
MAX Compactforming Elements
- TI 4: Cubicles Made of MAX Compact Laminates and  
MAX Compactforming Elements
- TI 5: Furnishing Objects with MAX Compact Laminates and  
MAX Compactforming Elements
- TI 6: Properties and Cleaning of MAX High-Pressure  
Laminates (HPL), MAX Compact Laminates (HPL), and  
MAX Melamine-Faced Chipboard
- TI 7: MAX EXTERIOR for Balconies and Railings
- TI 8: MAX Perforated Panels
- TI 9: MAX Metall
- TI 10: Working with MAX Laminates (HPL)
- TI 11: Stair Railings and Filler Panels made of  
MAX Compact Laminates and  
MAX Compactforming Elements
- TI 12: MAX EXTERIOR, Facade and Wall Cladding
- TI 14: PU Safety Edges for Doors and Furniture Parts  
(out of print)
- TI 16: Tender Specifications for Cubicles and Shower Units made  
of MAX Compact Laminates
- TI 17: MAX EXTERIOR Bonded Panels (out of print)
- TI 18: MAX Alumax, MAX Aluphenol and MAX Alucompact

Please file this  
Technical Information brochure  
into section 1 of your  
MAX Information Folder.

\* = changes from previous edition

# Contents

## **MAX Furniture Boards and the Environment**

MAX High-Pressure Laminates	4
MAX Melamine-Faced Chipboard	4
MAX Furniture Boards	4

## **Physical Properties**

MAX High-Pressure Laminates (HPL) and MAX Compact Laminates (HPL)	5
MAX Melamine-Faced Chipboard	6

## **Fire Behaviour**

MAX High-Pressure Laminates (HPL) and MAX Compact Laminates (HPL)	7
MAX Melamine-Faced Chipboard	7

## **Resistance to Chemicals**

MAX High-Pressure Laminates (HPL) and MAX Compact Laminates (HPL)	8
- No damage even under long exposure	9
- No damage under short exposure	11
- High risk of damage even under short exposure	11
- Aggressive gases	11
MAX Melamine-Faced Chipboard	11

## **Cleaning**

Special fields of application for MAX Furniture Boards	14
Disinfecting the surfaces of MAX Furniture Boards	14
Warranty	14

# MAX Laminates and The Environment

## MAX Laminates

of all thicknesses are made from natural fibres, amounting to some 60% of their total weight, and together with synthetic resins are fused under high pressure and temperature, hardening irreversibly in the process. They are thermoset plastics - High Pressure Laminates conforming to European Standard ES 438. Our Laminates contain no organic halogens (chlorine, fluorine, bromine etc.) as are found in propellants or PVC. They contain neither asbestos nor wood preservatives such as fungicides or pesticides and are also free from sulphur, mercury and cadmium.

The Laminates are exceptionally abrasion resistant, perfect for use in conjunction with foodstuffs, and - thanks to their dense surface - they are hygienic and easy to clean. The waste produced in machining (sawing, milling, etc.) is non hazardous to health. Consequently, laminate waste may be burnt off in modern refuse incinerators without emitting environmentally harmful hydrochloric acid, organic chlorines, or dioxins. At suitably high incineration temperatures, gas dwell times, and a sufficient supply of oxygen, the laminates break down into carbon dioxide, nitrogen, water and ashes. The resulting energy may be put to further use. The product deposits on municipal land fill areas and refuse dumps without problem. Please make sure to observe the national laws and regulations governing waste disposal.

## \* ON CERT

certifies the compliance of qualities with ON EN 438 all over the world.

## MAX Melamine-Faced Chipboard (MFC)

is melamine-coated flat-pressed chipboard produced in accordance with Austrian/German Standards ÖNORM/DIN 68765, consisting of chipboard of quality group V20/E1 and resin-treated decorative paper. These dense, irreversibly hardened surface layers help prevent the emission of minute amounts of formaldehyde from the chipboard. MAX Melamine-Faced Chipboard is particularly suited for all types of carcass furniture in living and office areas. As far as the disposal of MFC waste is concerned, the same rules apply as for MAX Laminates.

On account of their composition, **MAX Furniture Boards** are highly suitable for use in living and open areas, especially in homes, medical environments and areas where hygiene is of utmost importance. MAX Furniture Boards have had a proven record in these areas of application for decades.

# Physical Properties

## MAX High Pressure Laminates (HPL) and MAX Compact Laminates (HPL) according to ÖNORM/ES 438

Property tested according to ES 438.2	Unit of measurement	MAX High-Pressure Laminate		MAX Compact Laminate		MAX Compact Laminate, F-grade		MAX High-Pressure Laminate, F-grade		MAX Postforming Laminate	
		Nominal value <sup>3)</sup>	Actual value	Nominal value <sup>3)</sup>	Actual value	Nominal value <sup>3)</sup>	Actual value	Nominal value <sup>3)</sup>	Actual value	Nominal value <sup>3)</sup>	Actual value
Type according to ES 438	–	S	–	CGS	–	CGF	–	F	–	P	–
Bulk density DIN 53479	g/cm <sup>3</sup>	–	1,4	–	1,4	–	1,4	–	1,4	–	1,4
Thickness (e.g.)	mm	[1,0]	1,0	[10]	10	[10]	10	[1,5]	1,5	[0,8]	0,8
Thickness tolerance	mm	± 0,1	± 0,1	–	± 0,5	–	± 0,5	± 0,15	± 0,15	± 0,1	± 0,1
Abrasion resistance	U	≥ 350	450	≥ 350	450	≥ 350	450	≥ 350	450	≥ 350	450
Impact resistance	N	≥ 20	30	–	–	–	–	≥ 20	25	≥ 20	25
Falling ball impact resistance	mm Ø	–	–	≤ 10	8	≤ 10	8	–	–	–	–
Scratch resistance	N	≥ 2	3,0	≥ 2	3,0	≥ 2	3,0	≥ 2	3,0	≥ 2	2,5
Flectional resistance	N/mm <sup>2</sup>	≥ 85	110	≥ 100	110	≥ 80	100	≥ 70	100	–	100
E-Modulus	N/mm <sup>2</sup>	–	–	10000	12000	9000	11000	–	–	–	–
Tensile strength	N/mm <sup>2</sup>	≥ 70	80	≥ 70	80	≥ 60	80	≥ 60	70	≥ 60	70
Susceptibility to cracking	–	4	5	4	5	4	5	4	5	4	5
Formability (radius)	mm	–	–	–	–	–	–	–	–	15	8 lengthwise
Resistance to blistering	s	–	–	–	–	–	–	–	–	≥ 10	20
Building material class according to DIN 4102	–	B2	B2	B2	B2	–	B1	–	B1	–	B2
Building material class according to ÖNORM B 3800	–	–	B2	–	B1	–	B1	–	B1	–	B2
Resistance to colour change in light	grade	≥ 6	6-8	≥ 6	6-8	≥ 6	6-8	≥ 6	6-8	≥ 6	6-8
Dimensional changes during climatic changes, measured at 20°C	l % q %	≤ 0,3 ≤ 0,5	0,15 0,3	≤ 0,15 ≤ 0,25	– 0,05	≤ 0,15 ≤ 0,25	0,05 0,1	≤ 0,25 ≤ 0,4	0,20 0,35	≤ 0,35 ≤ 0,6	0,10 0,25
Dimensional changes during climatic changes, measured at elevated temperatures	l % q %	< 0,5 < 1,0	0,25 0,60	≤ 0,3 ≤ 0,6	0,05 0,15	≤ 0,3 ≤ 0,6	0,1 0,25	≤ 0,45 ≤ 0,9	0,30 0,70	≤ 0,6 ≤ 1,1	0,20 0,50
Resistance to boiling water	%	≤ 10	4,0	≤ 2,0	0,3	≤ 2	0,5	≤ 10	5,0	≤ 18	13
Behaviour in damp heat alternating atmosphere	%	no noticeable change									
Coefficient of thermal expansion	1/K	–	20x10 <sup>-6</sup>	–	20x 10 <sup>-6</sup>	–	20x10 <sup>-6</sup>	–	20 x 10 <sup>-6</sup>	–	20 x 10 <sup>-6</sup>
Thermal conductivity λ	W/mK	–	ca. 0,3	–	ca. 0,3	–	ca. 0,3	–	ca. 0,3	–	ca. 0,3
Resistance to vapour diffusion	μ	ca. 17200									
Surface resistance	Ohm	–	10 <sup>9</sup> –10 <sup>11</sup>	–	10 <sup>9</sup> –10 <sup>11</sup>	–	10 <sup>9</sup> –10 <sup>11</sup>	–	10 <sup>9</sup> –10 <sup>11</sup>	–	10 <sup>9</sup> –10 <sup>11</sup>
Resistance to cigarette burns	–	no noticeable change; <sup>1)</sup>									
Resistance to hot soucepans	≤ 180° C	no noticeable change; no blisters or cracks <sup>2)</sup>									
Tolerance of nominal sizes	mm	+ 10 - 0									

<sup>1)</sup> Minimal change of sheen, yellowish to brownish discoloration permissible according to ES 438

<sup>2)</sup> Minimal change of sheen admissible according to ES 438

<sup>3)</sup> According to ES 438

### Legend:

S Normal quality  
P Postforming quality  
F Fire retardant  
Mpa Megapascal

C Compact Laminate  
CF Compact Laminate "F", fire retardant  
K Kelvin = temperature difference  
W Watt  
N Newton

1N ≈ 0,102 kp  
1MPa ≈ 1N/mm<sup>2</sup> ≈ 10 kp/cm<sup>2</sup>

**MAX Melamine-Faced Chipboard  
according to ÖNORM/DIN 68765**

Physical Properties	Unit of Measurement	Nominal value <sup>1)</sup>	Actual value	Test Standard
Bulk density KT ≤ 13mm ≥ 13mm	g/dm <sup>3</sup>	– –	ca. 700 ca. 680	ES 323
Thickness of layer Cl. 1 Cl. 2	mm	≤ 0,14 ≥ 0,14	0,12 ≥ 0,16	ON-C 9751
Flectional resistance ≤ 13mm Cl. 1/Cl. 2 13-20mm Cl. 1/Cl. 2	N/mm <sup>2</sup>	17/18 16/17	20 18	ES 310
Transverse tensile strength ≤ 13mm 13-20mm	N/mm <sup>2</sup>	0,40 0,35	0,45 0,40	ES 319
Thickness tolerance up to 20mm	mm	+ 0,50 – 0,30	+ 0,50 – 0,30	–
Dimensional stability in alternating climate 20°C	–	≤ 0,5	≤ 0,5	ES 438 2.10
Abrasion resistance	Rotation	depending on design		ES 438 2.6
Scratch hardness	N	≥ 1,5	2,0	ES 438 2.14
Resistance to steam	–	Apart from change in sheen no permanent change		ES 438 2.24
Susceptibility to cracking	–	Grade 0		ON-C9751 3.7.2
Resistance to colour change in light	–	≥ Grade 6		ES 438 2.16
Formaldehyde emittance	mg HCHO/hm <sup>2</sup>	≤ 3,5 E1	0,30 E1	DIN 52368
Resistance to staining	–	1A		ES 438 2.15
Thermal conductivity	W/mK	ca. 0,12		–

<sup>1)</sup> Nominal value according to ÖNORM/DIN 68765

# Fire Behaviour

## MAX High-Pressure Laminates (HPL) and MAX Compact Laminates (HPL)

### \* ON CERT

- Standard-quality MAX High-Pressure Laminates (HGS), as we produce them for joiners and the furniture industry, are classified B2 construction materials, i.e. normally combustible in accordance with ÖNORM B 3800 Part 1. They are TR1 - non drip - and Q1 - low smoke emission.

- Standard quality MAX Compact Laminates (CGS) in thicknesses of 2 mm and over classify as B1 construction materials, i.e. fire resistant in accordance with ÖNORM B 3800 Part 1: Österreichisches Kunststoffinstitut (Austrian Plastics Institute), test certificate no. 37338/97.4.29.

For special applications, we produce F-grade MAX High-Pressure Laminates and F-grade MAX Compact Laminates,

- \* corresponding to types HGF and
- \* CGF in ON EN 438.

They are fire retardant (B1), non-drip (TR1), and have a low emission of smoke - all in accordance with ÖNORM B 3800 Part 1: ÖKI (Austrian Plastics Institute) test certificate no. 37337/97.4.28. In accordance with DIN 4102 Compact

- \* Laminates CGF are B1 fire resistant: the thicknesses of 6 - 10 mm are monitored under test mark PA-III 2.2100 by the Institut für Bautechnik, Berlin.

Seeberufsgenossenschaft Hamburg-Schiffssicherheitsabteilung, licence no. 705 K 17. Please contact us for complete information if you require this special quality, as is used in ship-building, tunnel construction and underground applications in building construction.

## MAX Melamine-Faced Chipboard

MAX Melamine-Faced Chipboard is classified a B2 construction material, i.e. normally combustible in accordance with ÖNORM B 3800 and DIN 4102. Upon request we produce Melamine-Faced Chipboard that is non-readily combustible B1 in accordance with ÖNORM B 3800, Part 1: Österr. Kunststoffinstitut 37339/97.4.29.

# Resistance to Chemicals

## MAX High-Pressure Laminates (HPL) and MAX Compact Laminates (HPL)

### \* ON CERT

Technical Information Brochure No. 6 focuses on the chemical stability of MAX High-Pressure Laminates and MAX Compact Laminates, advising on possible applications.

Thanks to their high-density surface, MAX High-Pressure Laminates (HPL according to

\* ON EN 438 and ISO 4586/I) have excellent mechanical properties and are resistant to high temperatures while being highly resistant to a great number of chemicals. Therefore, MAX Laminates may safely be used in areas where surfaces are exposed to chemicals such as:

- chemicals used in laboratories
- solvents
- disinfectants
- \* ■ colouring agents (restr.)
- cosmetics

Laboratories and medical facilities are heavy-duty applications, calling for utmost care in production and installation. For this reason, the use of MAX Compact Laminates (HPL) should seriously be taken into consideration.

While MAX High-Pressure Laminates are resistant to a vast number of chemicals, there are some agents that may damage their surfaces. The extent of damage is a function of

- the concentration of
- the exposure time to
- and the temperature of the agents used.

Without claim to completeness, the following list summarises commonly used substances (solid, dissolved, liquid, gaseous), indicating the resistance of MAX High-Pressure Laminates and MAX Compact Laminates to these at room temperature. Please contact us for more detailed information on the use of agents not contained in the summary. In addition, we recommend you to make tests of your own.

No damage even under long exposure

MAX High-Pressure Laminates and MAX Compact Laminates are resistant to the following substances and agents. Even with longer exposure times (e.g., an exposure time of 16 hours according to DIN 53799 and ISO 4586), these chemicals will not affect the surface of MAX High-Pressure Laminates.

Substance	Chemical formula	Chlorobenzene	C <sub>6</sub> H <sub>5</sub> Cl
Acetic Acid	CH <sub>3</sub> COOH	Chloroform	CHCl <sub>3</sub>
Acetone	CH <sub>3</sub> COCH <sub>3</sub>	Cholesterol	C <sub>27</sub> H <sub>46</sub> OH
Active charcoal		Citric acid	C <sub>6</sub> H <sub>8</sub> O <sub>7</sub>
Alcohol	ROH	Clay	
Alcohol, beverages		Coal	
Alcohol, primary	RCH <sub>2</sub> OH	Cocaine	C <sub>17</sub> H <sub>21</sub> O <sub>4</sub> N
Alcohol, secondary	RR'CHOH	Coffee	
Alcohol, tertiary	RR'R''COH	Common salt	NaCl
Aldehyde	RCHO	Copper sulphate	CuSO <sub>4</sub> .aq
Alum liquor	KAl(SO <sub>4</sub> ) <sub>2</sub> .12H <sub>2</sub> O	Cosmetics	
Aluminium chloride	AlCl <sub>3</sub> .aq.	Cresol	CH <sub>3</sub> C <sub>6</sub> H <sub>4</sub> OH
Aluminium sulphate	Al <sub>2</sub> (SO <sub>4</sub> ) <sub>3</sub>	Cresylic acid	CH <sub>3</sub> C <sub>6</sub> H <sub>4</sub> COOH
Aluminium potassium sulphate	KAl(SO <sub>4</sub> ) <sub>2</sub>	Cyclohexane	C <sub>6</sub> H <sub>12</sub>
Amides	RCONH <sub>2</sub>	Cyclohexanol	C <sub>6</sub> H <sub>11</sub> OH
Amines, primary	RNH <sub>2</sub>	Detergents	
Amines, secondary	(RR')NH	Dextrose	C <sub>6</sub> H <sub>12</sub> O <sub>6</sub>
Amines, tertiary	(RR'R'')N	Digitonin	C <sub>56</sub> H <sub>92</sub> O <sub>29</sub>
Ammonia	NH <sub>4</sub> OH	Dimethyl formamide	HCON(CH <sub>3</sub> ) <sub>2</sub>
Ammonium chloride	NH <sub>4</sub> Cl	Dimethyl acetic acid	CH <sub>3</sub> COOH
Ammonium sulphate	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub>	Dioxan	C <sub>8</sub> H <sub>16</sub> O <sub>2</sub>
Ammonium sulphate	NH <sub>4</sub> SCN	Dulcitol	C <sub>6</sub> H <sub>14</sub> O <sub>6</sub>
Amyl acetate	CH <sub>3</sub> COOC <sub>5</sub> H <sub>11</sub>	Ester	RCOOR'
Amyl alcohol	C <sub>5</sub> H <sub>11</sub> OH	Ethanol	C <sub>2</sub> H <sub>5</sub> OH
Aniline	C <sub>6</sub> H <sub>5</sub> NH <sub>2</sub>	Ether	ROR'
Animal fat		Ethyl acetate	CH <sub>3</sub> COOC <sub>2</sub> H <sub>5</sub>
Animal fodder		Ethylene dichloride	CH <sub>2</sub> :CCl
Arabinose	C <sub>5</sub> H <sub>10</sub> O <sub>5</sub>	Fodder	
Ascorbic acid	C <sub>6</sub> H <sub>8</sub> O <sub>6</sub>	Foodstuffs	
Asparagine	C <sub>4</sub> H <sub>7</sub> O <sub>3</sub> N <sub>2</sub>	Formaldehyde	HCOH
Aspartic acid	C <sub>4</sub> H <sub>7</sub> O <sub>4</sub> N	Formic acid up to 10% HCOOH	
p-Aminoacetophenon	NH <sub>2</sub> .C <sub>6</sub> H <sub>4</sub> COCH <sub>3</sub>	Fructose	C <sub>6</sub> H <sub>12</sub> O <sub>6</sub>
Baker's yeast		Galactose	C <sub>6</sub> H <sub>12</sub> O <sub>6</sub>
Barium chloride	BaCl <sub>2</sub>	Gelatine	
Barium sulphate	BaSO <sub>4</sub>	Glacial acetic acid	CH <sub>3</sub> COOH
Benzaldehyde	C <sub>6</sub> H <sub>5</sub> CHO	Glucose	C <sub>6</sub> H <sub>12</sub> O <sub>6</sub>
Benzene	C <sub>6</sub> H <sub>6</sub>	Glycerine	CH <sub>2</sub> OH.CHOH.CH <sub>2</sub> OH
Benzidine	NH <sub>2</sub> .C <sub>6</sub> H <sub>4</sub> .C <sub>6</sub> H <sub>4</sub> NH <sub>2</sub>	Glycocoll	NH <sub>2</sub> CH <sub>2</sub> COOH
Benzoic acid	C <sub>6</sub> H <sub>5</sub> COOH	Glycol	HOCH <sub>2</sub> .CH <sub>2</sub> OH
Biogel		Graphite	C
Blood		Greases	
Boric acid	H <sub>3</sub> BO <sub>3</sub>	Gypsum	CaSO <sub>4</sub> .2H <sub>2</sub> O
Butylacetate	CH <sub>3</sub> COOC <sub>4</sub> H <sub>9</sub>	Heparin	
Butyl alcohol	C <sub>4</sub> H <sub>9</sub> OH	Heptanol	C <sub>7</sub> H <sub>15</sub> OH
Cadmium acetate	Cd(CH <sub>3</sub> COO) <sub>2</sub>	Hexane	C <sub>6</sub> H <sub>14</sub>
Cadmium sulphate	CdSO <sub>4</sub>	Hexanol	C <sub>6</sub> H <sub>13</sub> OH
Caffeine		Hydrogen peroxide 3% H <sub>2</sub> O <sub>2</sub>	
Calcium carbonate (lime)	CaCO <sub>3</sub>	Hypophysin	
Calcium chloride	CaCl <sub>2</sub>	Imido "Roche"	
Calcium hydroxide	Ca(OH) <sub>2</sub>	Immersion oil	
Calcium nitrate	Ca(NO <sub>3</sub> ) <sub>2</sub>	Ink	
Cane sugar	C <sub>12</sub> H <sub>22</sub> O <sub>11</sub>	Inorganic salts and their mixtures	
Carbolic acid	C <sub>6</sub> H <sub>5</sub> O <sub>4</sub>	Inositol	C <sub>6</sub> H <sub>6</sub> (OH) <sub>6</sub>
Carbolic acid - xylene	C <sub>6</sub> H <sub>5</sub> OH-C <sub>6</sub> H <sub>4</sub> (CH <sub>3</sub> ) <sub>2</sub>	Insecticides	
Carbon tetrachloride	CCl <sub>4</sub>	Isoamyl acetate	CH <sub>3</sub> COOC <sub>5</sub> H <sub>11</sub>
Casein		Isopropanol	C <sub>3</sub> H <sub>7</sub> OH
Castor oil		Ketone	RC:OR'
Cedarwood oil (concentrated)			
Cement			
Chloral hydrate	CCl <sub>3</sub> CH(OH) <sub>2</sub>		

Lactic acid	CH <sub>3</sub> CHOHCOOH	1,2-Propylene glycol	CH <sub>3</sub> CHOHCH <sub>2</sub> OH	Tetraline	C <sub>10</sub> H <sub>12</sub>
Lactose	C <sub>12</sub> H <sub>22</sub> O <sub>11</sub>	Pyridine	C <sub>5</sub> H <sub>5</sub> N	Thiourea	NH <sub>2</sub> CSNH <sub>2</sub>
Lead acetate	Pb(CH <sub>3</sub> COO) <sub>2</sub>			Toepfer's reagent	
Lead nitrate	Pb(NO <sub>3</sub> ) <sub>2</sub>	Qinol	HOCH <sub>2</sub> H <sub>4</sub> OH	Toulene	C <sub>6</sub> H <sub>5</sub> CH <sub>3</sub>
Laevoluse	C <sub>6</sub> H <sub>12</sub> O <sub>6</sub>			Trehalose	C <sub>12</sub> H <sub>22</sub> O <sub>11</sub>
Lipstick		Raffinose	C <sub>18</sub> H <sub>32</sub> O <sub>15</sub> ·5H <sub>2</sub> O	Trichloro ethylene	CHCl:CCl <sub>2</sub>
Lithium carbonate	Li <sub>2</sub> CO <sub>3</sub>	Rhamnose	C <sub>6</sub> H <sub>12</sub> O <sub>5</sub> ·H <sub>2</sub> O	Trypsin	
		Rochelle salt		Tryptophane	C <sub>11</sub> H <sub>12</sub> O <sub>2</sub> N <sub>2</sub>
Magnesium carbonate	MgCO <sub>3</sub>			Turpentine	
Magnesium chloride	MgCl <sub>2</sub>	Saccarose	= Cane sugar	Tymol	C <sub>10</sub> H <sub>14</sub> O
Magnesium sulphate	MgSO <sub>4</sub>	Salicylaldehyde	C <sub>6</sub> H <sub>4</sub> OH.CHO	Tymol buffer solution	
Maltose	C <sub>12</sub> H <sub>22</sub> O <sub>11</sub>	Salicylic acid	C <sub>6</sub> H <sub>4</sub> OHCOOH		
Manitol	C <sub>6</sub> H <sub>14</sub> O <sub>6</sub>	Saponin		Urea solution	CO(NH <sub>2</sub> ) <sub>2</sub>
Mannose	C <sub>6</sub> H <sub>12</sub> O <sub>6</sub>	Soap		Urease	
Mercury	Hg	Sodium acetate	CH <sub>3</sub> COONa	Uric acid	C <sub>5</sub> H <sub>4</sub> N <sub>4</sub> O <sub>3</sub>
Mesoinositol	C <sub>6</sub> H <sub>8</sub> (OH) <sub>6</sub>	Sodium carbonate	Na <sub>2</sub> CO <sub>3</sub>	Urine	
Methanol	CH <sub>3</sub> OH	Sodium chloride	NaCl		
Milk		Sodium citrate	Na <sub>3</sub> C <sub>6</sub> H <sub>5</sub> O <sub>7</sub> ·5H <sub>2</sub> O	Vanillin	C <sub>8</sub> H <sub>8</sub> O <sub>3</sub>
Mineral oils		Sodium diethylene barbiturate		Vaseline	
Mineral salts					
		Sodium hydrogen sulphite	NaHSO <sub>3</sub>	Water	H <sub>2</sub> O
Nail varnish		Sodium hydrogen-carbonate	NaHCO <sub>3</sub>	Water colours	
Nail varnish remover		(Sodium carbonate)		Xylene	C <sub>6</sub> H <sub>4</sub> (CH <sub>3</sub> ) <sub>2</sub>
α-Naphtol	C <sub>10</sub> H <sub>7</sub> O <sub>7</sub>	Sodium hydroxide solution	NaOH	Yeasts	
α-Naphtylamine	C <sub>10</sub> H <sub>7</sub> NH <sub>2</sub>	up to approx. 10%		Zinc chloride	ZnCl <sub>2</sub>
Nickel sulphate	NiSO <sub>4</sub>	Sodium hyposulphite	Na <sub>2</sub> S <sub>2</sub> O <sub>4</sub>	Zinc sulphate	ZnSO <sub>4</sub>
Nicotine	C <sub>10</sub> H <sub>14</sub> N <sub>2</sub>	Sodium nitrate	NaNO <sub>3</sub>		
p-Nitrophenol	C <sub>6</sub> H <sub>4</sub> NO <sub>2</sub> OH	Sodium phosphate	Na <sub>3</sub> PO <sub>4</sub>		
Nonne-Appelt-reagent		Sodium silicate	Na <sub>2</sub> SiO <sub>3</sub>		
		Sodium sulphate	Na <sub>2</sub> SO <sub>4</sub>		
Octanol	C <sub>8</sub> H <sub>17</sub> OH	Sodium sulphide	Na <sub>2</sub> S		
n-Octyl alcohol	C <sub>8</sub> H <sub>17</sub> OH	Sodium sulphite	Na <sub>2</sub> SO <sub>3</sub>		
Olive oil		Sodium tartrate	Na <sub>2</sub> C <sub>4</sub> H <sub>4</sub> O <sub>6</sub>		
Oleic acid	CH <sub>3</sub> (CH <sub>2</sub> ) <sub>7</sub> CH: CH(CH <sub>2</sub> ) <sub>7</sub> COOH	Soil			
Organic solvents		Soot			
Ointments		Sorbitol	C <sub>6</sub> H <sub>14</sub> O <sub>6</sub>		
Pandy's reagent		Standard acetate solution			
Paraffin waxes	C <sub>n</sub> H <sub>2n+2</sub>	Standard I -Nutrient agar			
Paraffinic oil		Standard I -Nutrient broth			
Pentanol	C <sub>5</sub> H <sub>11</sub> OH	Standard II -Nutrient agar			
Peptone		Standard II -Nutrient broth			
Petroleum benzin		Starch			
Phenol and phenol derivatives	C <sub>6</sub> H <sub>5</sub> OH	Starch			
o-Phenolphthalein	C <sub>20</sub> H <sub>14</sub> O <sub>4</sub>	-common salt solution			
o-Polishing agents (creams and waxes)		Stearic acid	C <sub>17</sub> H <sub>35</sub> COOH		
Potash lye	KOH	Styrene	C <sub>6</sub> H <sub>5</sub> ·CH:CH <sub>2</sub>		
up to approx. 10%		Sugar and sugar derivatives			
Potassium bromate	KBrO <sub>3</sub>	Sulphur	S		
Potassium bromide	KBr				
Potassium carbonate	K <sub>2</sub> CO <sub>3</sub>	Talcum powder	3MgO,4SiO <sub>2</sub> , H <sub>2</sub> O		
Potassium chloride	KCl	Tannic acid	C <sub>76</sub> H <sub>52</sub> O <sub>46</sub>		
Potassium hexacyanoferrate	K <sub>4</sub> Fe(CN) <sub>6</sub>	Tartaric acid	C <sub>4</sub> H <sub>6</sub> O <sub>6</sub>		
Potassium iodate	KJO <sub>3</sub>	Tea			
Potassium nitrate	KNO <sub>3</sub>	Test serum for blood grouping			
Potassium sodium tartrate	KNaC <sub>4</sub> H <sub>4</sub> O <sub>6</sub>	Tetrahydrofuran	C <sub>4</sub> H <sub>8</sub> O		
Potassium sulphate	K <sub>2</sub> SO <sub>4</sub>				
Potassium tartrate	K <sub>2</sub> C <sub>4</sub> H <sub>4</sub> O <sub>6</sub>				
Potato starch					
Propanol	C <sub>3</sub> H <sub>7</sub> OH				

■ No damage under short exposure

Spilling or allowing the substances listed hereinafter to act only briefly (esp. in liquid or dissolved form) will not affect the surfaces of MAX High-Pressure Laminates and MAX Compact Laminates if these are wiped dry within 10 to 15 minutes. Please note that exposure time is an important factor even with diluted agents. As the diluent evaporates, the concentration of the agent itself increases, attacking the surfaces of MAX High-Pressure Laminates and MAX Compact Laminates. Thus, agents may damage the surface even if the concentrations used are lower than specified in the following summary. We recommend you to make some tests of your own.

Substance	Chemical formula
Amino-S acid up to 10%	$\text{NH}_2\text{SO}_3\text{H}$
Aniline dyes	
Antiliming agents	
Arsenic acid up to 10%	$\text{H}_3\text{AsO}_4$
Boric acid	$\text{H}_3\text{BO}_3$
Crystal violet (Gentian violet)	$\text{C}_{24}\text{H}_{28}\text{N}_3\text{Cl}$
Esbach's reagent	
Formic acid over 10%	$\text{HCOOH}$
Fuchsine solution	$\text{C}_{19}\text{H}_{19}\text{N}_3$
Hair dyes and bleaches	
Hydrochloric acid up to 10%	$\text{HCl}$
Hydrogen peroxide over 3-30% (Perhydrol)	$\text{H}_2\text{O}_2$
Inorganic acids up to 10%	
Iodine solution	$\text{I}$
Iron (II) chloride solution	$\text{FeCl}_2$
Iron (III) chloride	$\text{FeCl}_3$
Mercury (II) chromate	$\text{HgCr}_2\text{O}_7$
Methylene blue	$\text{C}_{16}\text{H}_{18}\text{N}_3\text{ClS}$
Millon's reagent	$\text{OHg}_2\text{NH}_2\text{Cl}$
Nitric acid up to 10%	$\text{HNO}_3$
Nylander's reagent	
Oxalic acid	$\text{COOH.COOH}$
Phosphoric acid up to 10%	$\text{HPO}_4$
Picric acid	$\text{C}_6\text{H}_2\text{OH}(\text{NO}_2)_3$
Potash lye over 10%	$\text{KOH}$
Potassium hydrogensulphate	$\text{KHSO}_4$
Potassium chromate	$\text{K}_2\text{CrO}_4$
Potassium dichromate	$\text{K}_2\text{Cr}_2\text{O}_7$
Potassium iodide	$\text{KI}$
Potassium permanganate	$\text{KMnO}_4$
Silver nitrate	$\text{AgNO}_3$
Sodium hydrogen-sulphate	$\text{NaHSO}_4$
Sodium hydroxide solution over 10%	$\text{NaOH}$
Sodium hypochloride	$\text{NaOCl}$
Sodium thiosulphate	$\text{Na}_2\text{S}_2\text{O}_3$
Sublimate solution (= mercury (II) chloride)	$\text{HgCl}_2$
Sulphuric acid up to 10%	$\text{H}_2\text{SO}_4$
Sulphurous acid up to 10%	$\text{H}_2\text{SO}_3$
Varnishes and adhesives, (chemically curing)	

■ High damage risk even under short exposure

The chemicals listed hereinafter will destroy MAX Laminate surfaces. Even if acting only very briefly, these substances may lead to matt and rough patches on the surface. Therefore, they have to be removed instantly.

Substance	Chemical formula
In concentrations above ca. 10%:	
Amino sulpho acid	$\text{NH}_2\text{SO}_3\text{H}$
Inorganic acids such as:	
Arsenic acid	$\text{H}_3\text{AsO}_4$
Aqua regia	$\text{HNO}_3 + \text{HCl} = 1:3$
Hydrochloric acid	$\text{HCl}$
Hydrofluoric acid	$\text{HF}$
Hydrogen bromide	$\text{HBr}$
Nitric acid	$\text{HNO}_3$
Phosphoric acid	$\text{H}_3\text{PO}_4$
Potassium dichromate	
sulphuric acid	$\text{K}_2\text{CrO}_7 + \text{H}_2\text{SO}_4$
Sulphuric acid	$\text{H}_2\text{SO}_4$

■ Aggressive gases

Frequent exposure to the volatile substances listed below will result in damage to MAX High-Pressure Laminate surfaces:

Substance	Chemical formula
Acid vapours	
Bromine	$\text{Br}_2$
Chlorine	$\text{Cl}_2$
Nitrous vitriol vapours	$\text{N}_2\text{O}_y$
Sulphur dioxide	$\text{SO}_2$

**MAX Melamine-Faced  
Chipboard**

MAX Melamine-Faced Chipboard has a resistance to chemicals similar to MAX High-Pressure Laminates. Please contact us if you need additional information.

# Cleaning

MAX High-Pressure Laminates, MAX Compact Laminates and MAX Melamine-Faced Chipboard are all characterized by their hard and hygienic surfaces, which do not call for any particular maintenance. However they do need to be cleaned. The following table serves to advise on when and how to clean the panels and boards.

Type of soiling ▶  Degree of soiling ▼	Dust Dirt Dust/grease mixture pencil Chalk	Lime residues Lime stains (Water stains) Rust	Coffee Tea Fruit juices Sugar solutions	Grease Oil Fingerprints, feltpen, markers, ball-point, nicotine stains (tar stains), rubber streaks	Wax stains (candles, separating agents for presses) Crayons													
Little soiling, short exposure time	<p>■ Paper towel; soft, clean cloth (dry or moist); sponge or the like. When using moist cloth, wipe panel dry with absorbent paper towel</p> <p>■ Note: When cleaning with organic solvents or cold water and when using cloths or chamois leathers that have been used several times, smears may result. For best results, wipe panels clean with warm water, then wipe dry with paper towels</p> <p>Clean HPL surfaces regularly! Polishing is not necessary!</p>																	
Normal soiling, longer exposure time	<p>■ Clean hot water, clean cloth, soft sponge or brush (e.g., nylon brush). - Usual household detergents without scouring components (e.g. washing powder, soft soap or curd soap). Apply detergent. Allow to work into surface depending on degree of soiling. Then remove with clean water or window cleaning agent; repeat several times, if necessary. Remove detergent carefully to prevent streaks and smears. Rub dry with absorbent clean cloth (preferentially paper towels). Wipe surfaces dry, changing cloth frequently. Glass cleaner may also be used, but is more expensive.</p> <table border="1" data-bbox="371 1301 1449 1603"> <tr> <td data-bbox="371 1301 587 1386"></td> <td data-bbox="587 1301 802 1386"></td> <td data-bbox="802 1301 1018 1386"></td> <td colspan="3" data-bbox="1018 1301 1449 1386">Organic solvents such as acetone, spirit, benzin, trichloroethane, nail-varnish remover</td> </tr> <tr> <td data-bbox="371 1386 587 1603"></td> <td data-bbox="587 1386 802 1603"></td> <td data-bbox="802 1386 1018 1603"></td> <td data-bbox="1018 1386 1233 1603"></td> <td data-bbox="1233 1386 1449 1603">Paraffin and wax stains should be removed mechanically. Note: Avoid scratches. Use plastic edge or wooden spatula. Iron off residues by means of blotting paper</td> <td data-bbox="1449 1386 1596 1603"></td> </tr> </table> <p>■ For regular cleaning do not use abrasive or scouring agents (scouring powder, steel wool), polishing agents, waxes or bleaches. Do not use detergents containing strong acids or highly acidic salts such as decalcifiers containing formic acid or aminosulphoacid, hydrochloric acid, silver polish, or oven cleaners.</p>									Organic solvents such as acetone, spirit, benzin, trichloroethane, nail-varnish remover							Paraffin and wax stains should be removed mechanically. Note: Avoid scratches. Use plastic edge or wooden spatula. Iron off residues by means of blotting paper	
			Organic solvents such as acetone, spirit, benzin, trichloroethane, nail-varnish remover															
				Paraffin and wax stains should be removed mechanically. Note: Avoid scratches. Use plastic edge or wooden spatula. Iron off residues by means of blotting paper														
Extremely stubborn stains		Allow detergents or pastes consisting of detergents and water to act on the surface overnight. Liquid detergents with ultrafine polishing lime. Mild bleaches (with reservation). Note: Liquid detergents containing polishing lime and bleaches should be used sparingly!																
		To remove particularly stubborn lime stains, acidic detergents may be used (e.g., 10% acetic or citric acid).																
Be sure to follow safety regulations when cleaning with solvent! Open windows! No open flame!																		

	Lipstick Shoe polish Floor polish	Bacteriologic contamination (soap stains, epithelia, germs, blood, urine, faeces)	Water-soluble paint, mordanting agents, dispersion paint, water-soluble adhesives, dispersions (PVAc)	Solvents, varnishes, dyes and adhesives (varnish stains, spray paint, stamp paint)	Two-component varnishes and adhesives, synthetic resins such as aminoplastresin, polyurethane foam	Silicone, Sealing compounds Furniture polishes
				Organic solvents	Remove instantly, using water or organic solvents	Use cloth to wipe dry Silicone remover
				Organic solvents such as acetone, spirit, benzin, trichloroethane, nail-varnish remover	Cleaning is only possible before curing, therefore, remove immediately, using water or organic solvent	Silicone remover
		Use disinfectants in addition	Water and organic solvents			
		Steam cleaning is possible. Disinfection according to regulation. Be careful not to damage base material!	Please contact the producers of adhesives and varnishes for the best possible cleaning agents when using such substances on a regular/professional basis.			
			Soften with water or organic solvents, then peel or pull off.	Cleaning no longer possible! Condensation and reaction resin adhesives can no longer be removed after curing.		
				Dye stains can often be removed mechanically after curing.		

## Special Fields of Application for MAX Furniture Boards

Pharmacies  
Surgeries, hospitals,  
Veterinary medicine  
Drugstores  
Laboratories:  
- chemical laboratories  
- photo laboratories  
- medical laboratories  
- food laboratories

### Store construction

- hairdressers  
- butchers  
- food stores  
- fishmongers

### Meat-processing industry:

- meat and sausage factories  
- slaughter houses

Animal keeping in medicine and agriculture.

MAX-HPL surfaces are perfect for use in conjunction with foodstuffs: ISEGA/Aschaffenburg

\* 12264 U 98 Institute for Foodstuff Testing, Vienna  
Certificate no. 4700/JG/90.

## Disinfecting MAX Furniture Board Surfaces

■ MAX HPL surfaces have been found highly suitable for use in the aseptic areas of hospitals, laboratories, surgeries, etc.

\* by the Austrian Plastics Institute (Österreichisches Kunststoffinstitut) which has also confirmed the resistance of MAX HPL surfaces to disinfectants in its expertise no. 37114/97.6.20.

\* ■ The Hygieneinstitut of the University of Vienna certifies the disinfectability of MAX laminates and MAX compact laminates and their surfaces and edges of an equal degree with ceramic tiles, PVC and stainless steel.


■ MAX High-Pressure Laminates, MAX Compact Laminates, and MAX Melamine-Faced Chipboard are resistant to disinfectants based on the following chemicals:

Ethanol 70%  
Formalin 1% and 5%  
p-chlorine-m-cresole 0.3%  
Tosyl chloramide sodium 1%, 5%  
Alkyl dimethylbenzyl ammonium chloride 0.1%  
Alcohols  
Aldehydes  
Phenols  
Quaternary ammonium compounds

This list does not lay any claim to completeness. If other disinfectants are used, we recommend you to contact us and carry out some tests of your own.

## Warranty

ISOVOLTA warrant the quality of MAX High-Pressure Laminates, MAX Compact Laminates, and MAX Melamine-Faced Chipboard with regard to the values and specifications given in this Technical Information brochure. They shall clearly not be liable for imperfect processing, construction, and installation, as these are outside their influence. Local regulations are to be followed at all times. All information is based on current know-how. Suitability for certain applications cannot be confirmed in general.



**Multiclad**  
Facade Systems

**Multiclad Facade Systems**

Ph: +61 (0) 413 737 771

Fax: +61 (0) 2 9608 6558

Email: [info@multiclad.com.au](mailto:info@multiclad.com.au)

Web: [www.multiclad.com.au](http://www.multiclad.com.au)

Post: PO Box 511 DC, PRESTONS  
NSW. 2170 Australia

**isovolta**

Aktiengesellschaft

Industriezentrum N.Ö. Süd

A-2355 Wiener Neudorf

Telefon: 02236/605-0

Telefax

Vertrieb Österreich: 02236/605-402

Vertrieb Export: (0)2236/605-401

E-Mail: [max@isovolta.com](mailto:max@isovolta.com)

Internet: <http://www.isovolta.com/>